

Hohtokeli #2



Oil Pattern Distance: **30 Feet**
 Forward Oil Total: **1.96 mL**
 Forward Boards Crossed: **98 Boards**

Reverse Brush Drop: **30 Feet**
 Reverse Oil Total: **1.34 mL**
 Reverse Boards Crossed: **67 Boards**

Oil Per Board: **20 uL**
 Volume Oil Total: **3.3 mL**
 Total Boards Crossed: **165 Boards**


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	1	18	37	0.0	0.0	0.0	740
2	8L	8R	1	18	25	0.0	2.5	2.5	500
3	10L	10R	1	18	21	2.5	5.0	2.5	420
4	13L	13R	1	18	15	5.0	7.5	2.5	300
5	2L	2R	0	18	0	7.5	24.0	16.5	0
6	2L	2R	0	30	0	24.0	30.0	6.0	0

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	30.0	15.0	-15.0	0
2	15L	15R	1	22	11	15.0	11.9	-3.1	220
3	14L	14R	2	14	26	11.9	8.0	-3.9	520
4	13L	13R	2	14	30	8.0	4.1	-3.9	600
5	2L	2R	0	10	0	4.1	0.0	-4.1	0

Conditioner:
Type In or Select One

TransferType:
Type In or Select One

Forward




Reverse



Combined



Buff

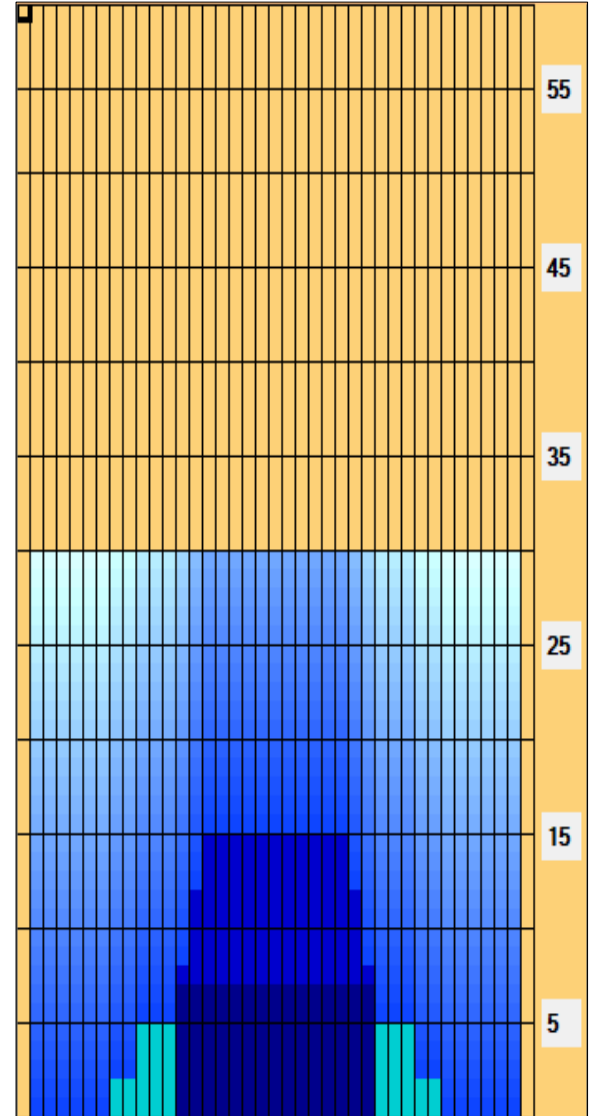

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	9	3.46	1.1	1.1	3.46	9

